


## MICRO-STYLE QUICK DISCONNECT CABLES

### View



- Female Micro-style
- Screwlocking with (auto) securing safety nut
- With molded cable
- PVC offers good resistance to oils and chemicals

### Dimensional data

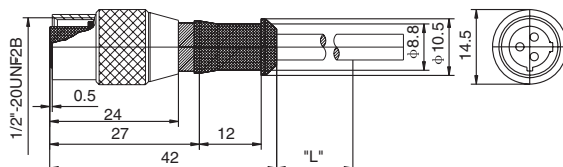

### Technical Data

Application Class: HNE acc. to DIN40040  
(-25 C/+90 C/ ≤ 100% rF)

Molded Body: TPU, Self-extinguishing

Nominal Power: 4A

Nominal Voltage: 300 VAC

Contact: CuZn, brass, pre-nickel and  
0.3 microns gold-plated

O-Ring: Viton

Body: TPU, self-extinguishing

Securing Safety nut: Nickel plated brass

Protection: IP68


Contact Resistance: ≤ 5m Ω

Insulation Group: C acc. to VDE0110

Test Voltage: 2.0 KV eff./ 60 s.

Insulation Resistance: >10<sup>9</sup> Ω

### Catalog Number

Part-No	Poles	Face View female	Color Code	Conductors		Outer Jacket	
				Gage	Stranding	φ mm	Material
UNF-FS3-PVC-2M	3		1=green 2=red/black 3=red/white	0.25mm <sup>2</sup>	26xφ0.13	5.0	PVC

Standard Length: 2.0 m, 5.0 m, 7.5 m, 10.0 m. Other cable Length or cable specifications on request


## MICRO-STYLE QUICK DISCONNECT CABLES

### View



- Female Micro-style right-angle style
- Screwlocking with (auto) securing safety nut
- With molded cable
- PVC offers good resistance to oils and chemicals

### Dimensional data

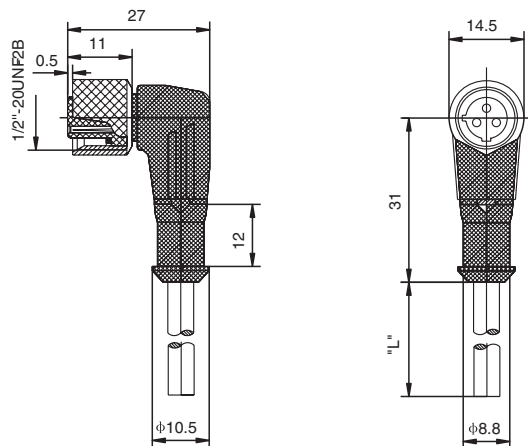

### Technical Data

Application Class: HNE acc. to DIN40040  
(-25 C/+90 C/ ≤ 100% rF)

Molded Body: TPU, Self-extinguishing

Nominal Power: 4A

Nominal Voltage: 300 VAC

Contact: CuZn, brass, pre-nickeled and  
0.3 microns gold-plated

O-Ring: Viton

Body: TPU, self-extinguishing

Securing Safety nut: Nickel plated brass

Protection: IP68


Contact Resistance: ≤ 5mΩ

Insulation Group: C acc. to VDE0110

Test Voltage: 2.0 KV eff./ 60 s.

Insulation Resistance: >10<sup>9</sup>Ω

### Catalog Number

Part-No	Poles	Face View female	Color Code	Conductors		Outer Jacket	
				Gage	Stranding	φ mm	Material
UNF-FA3-PVC-2M	3		1=green 2=red/black 3=red/white	0.25mm <sup>2</sup>	26xφ0.13	5.0	PVC
Standard Length: 2.0 m, 5.0 m, 7.5 m, 10.0 m. Other cable Length or cable specifications on request							