


# Miniature Inductive Proximity Sensor 6 mm Front & Top Sensing

## Specifications

Type			Miniature Inductive Proximity Sensor	
			Front Sensing	Top Sensing
Model Number	Normally Open	NPN	<b>MQP2-661.2N-A3L2F</b>	<b>MQP2-661.2N-A3L2T</b>
		PNP	<b>MQP2-661.2P-A3L2F</b>	<b>MQP2-661.2P-A3L2T</b>
	Normally Closed	NPN	<b>MQP2-661.2N-B3L2F</b>	<b>MQP2-661.2N-B3L2T</b>
		PNP	<b>MQP2-661.2P-B3L2F</b>	<b>MQP2-661.2P-B3L2T</b>
Sensing Range			1.2 mm	
Hysteresis			< 15 % of sensing range	
Repeatability			< 0.04 mm	
Supply Voltage			10 ~ 30 VDC incl. 10% ripple	
Current Consumption			< 10 mA max.	
Max. Switching Freq.			400 Hz	
Control Output			NPN or PNP Open Collector Transistor, 100 mA / 30 VDC Max.	
Response Time			0.5 msec.	
Output Protection			Short circuit and Reverse polarity protection	
Sensitivity Adjustment			-----	
Indicators			Output LED	
Conformity			CE	
Ambient Temperature			-25° to +70°C	
IP Protection			IP67	
Material			Polycarbonate	



## Electrical Connection

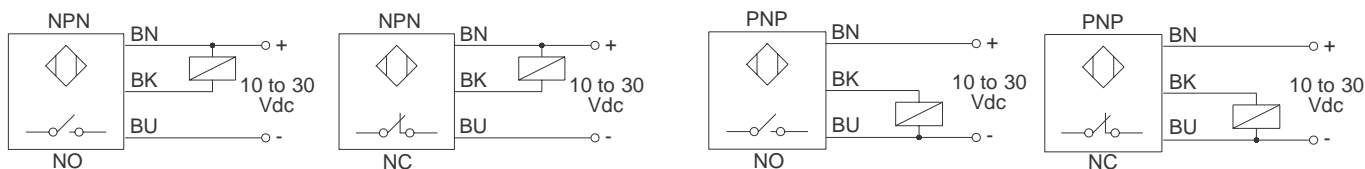

## Dimensions (Unit: mm)

MQP2-661.2(N/P)-(A/B)3L2F

MQP2-661.2(N/P)-(A/B)3L2T

